
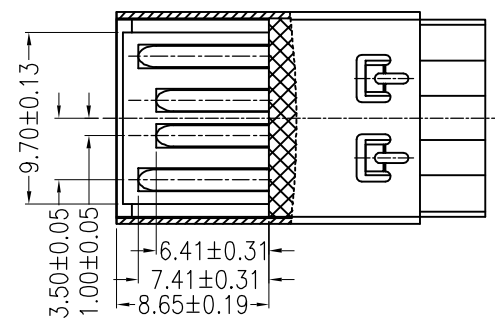





REV	DESCRIPTION	DATE	ECN NO.	CHANGER
A-0	The last word	1/20-'14		WMD

Table1

Finished product			Housing			Terminal			Shell		
OLD P/N	NEW P/N	SPEC	OLD P/N	NEW P/N	SPEC	OLD P/N	NEW P/N	SPEC	OLD P/N	NEW P/N	SPEC
BUSB-A1S248M-4B4N-W	10300404F136	USB A公插板无接地片大卡高黑色镀金 无卤(端子磷铜)	DH-UM7B29	21103C00051	USB A公插板无接地片大卡高黑色镀金 PBT黑色磷铜	ET-UMPF401	22503F00019	USB-A,B公插板无接地片大卡高黑色镀金	ES-UMTN61	22403S00275	USB A公插板无接地片大卡高黑色镀金

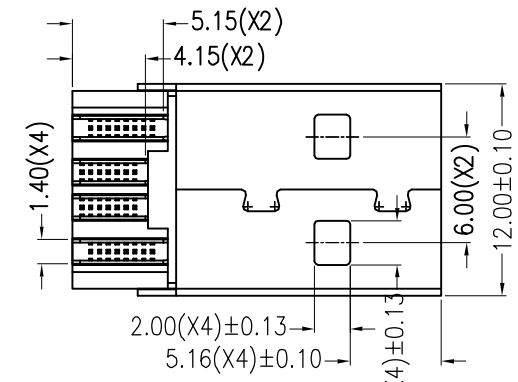

Section A-A

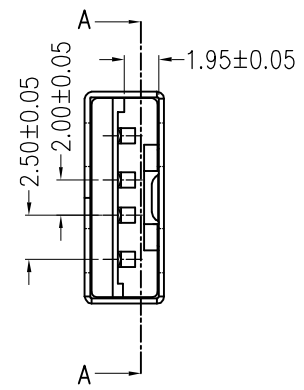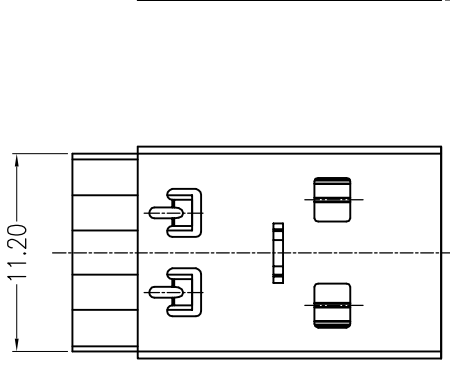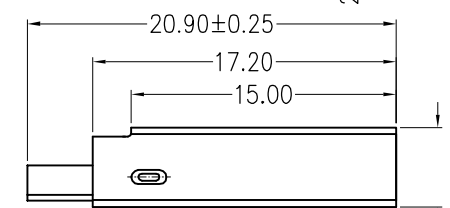

Specification

- Current Rating:1.5AMP at 250V AC
Voltage Rating:30V AC
- Insulation Resistance:1000MΩ Min
- Contact Resistance:30mΩ Max
- Dielectric Withstanding Voltage:500V AC for one minute
- Temperature Range:-40°C to +85°C
- Mechanical Characteristics:
Insertion Force:35 Newtons maximum
Extraction Force:10 Newtons minimum
- Durability: 1500 insertion/extraction cycles
- Salt spray test 24H.

P/N NOTE:

USB-A1SXM-X X4X-X
 W=without halogen
 Shell plate spec:T=Tin plated, N=Nickel plated
 Housing colour:B=Black, N=Nature,W=White,
 Contact plate spec:0=FU",
 1=3U",2=6U",3=15U",4=30U"
 Product sequence: 01、02、03、... ..

3	See Table1	Shell	SPCC	1	T=0.35
2	See Table1	Housing	P.B.T	1	
1	See Table1	Terminal	C5191	4	T=0.25
NO.	P/N	VARIETY	MATERIAL	QT,Y	REMARK

CZT® DONGGUAN ZHENGDE (YIHUA) CONNECTOR CO., LTD

X.±0.38	X.±4'	UNIT:	mm	DR:		TITLE: See Table1			
.X±0.25	.X±2'	3RD:		DE:					
.XX±0.20	.XX'	SCALE:	1:1	CHKD:		SHEET:	1/1	P/N:	See Table1
.XXX±0.10	.XX'	CUSTOMER DRAWING	REV:	A-0	APPD:	D/N:	1104-0248	M/N:	