
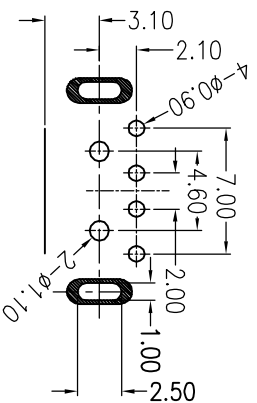

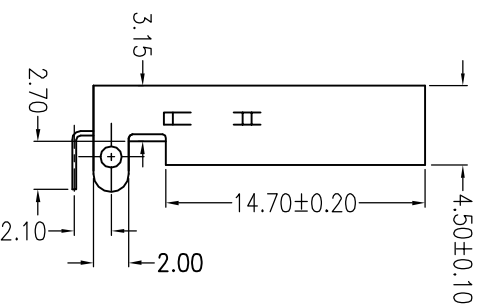
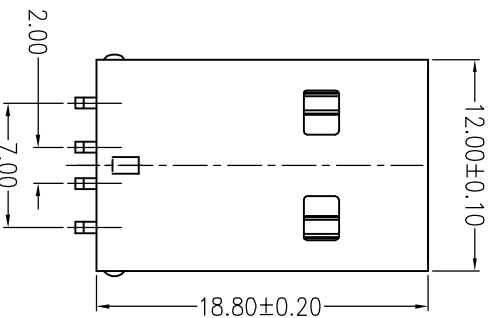


REV	DESCRIPTION	DATE	ECN NO.	CHANGER
A/0	The last word	2009.06.09		
A/1	View revise	2012.11.20	2012210	JACK



RECOMMENDED P.C.B HOLE LAYOUT
Tolerance:±0.05

- Specification
- 1.Voltage Rating:30V AC
 - 2.Current Rating:1.5AMP.
 - 3.Insulation Resistance:1000M Ω Min.
 - 4.Contact Resistance:30m Ω Max.
 - 5.Dielectric Withstanding Voltage:500V AC
 - 6.Temperature Range:-20°C to +60°C

P/N NOTE:
USB-A1D58M-X X4X-X

W=without halogen
Shell plate spec:T=Tin plated, N=Nickel plated
Housing colour:B=Black, N=Nature, W=White
Contact plate spec:0=FU", 1=3U", 2=6U", 3=15U", 4=30U"

3	S-UMXXX33	Shell	SPCC	1	T=0.30
2	USB-A1D02M-XX4-X	Housing	PBT	1	
1		Terminal	C2680	4	T=0.25
NO.	P/N	VARIETY	MATERIAL	QT,Y	REMARK

CZT[®] DONGGUAN ZHENGDE (YIHUA) CONNECTOR CO., LTD

X±0.38	X±4'	UNIT:	mm	DR:	newyear	TITLE:	USB A Plug DIP 90° Straight 4.6 Length 18.8		
X±0.25	X±2'	3RD:		DE:	newyear	SHEET:	1/1	P/N:	USB-A1D58M-XX4X-X
XX±0.20	XX'	SCALE:	1:1	CHKD:		D/N:	1004-0058	M/N:	
XXX±0.10	XX'	CUSTOMER DRAWING	REV:	A/1	APPD:				